Title: Allow multiple viewing groups per drawing instruction

S-100 Maintenance - Change Proposal Form

Organisation	NIWC	Date	4/14/2021
Contact	David Grant	ant Email David.Grant1@	

Change Proposal Type (Select only one option)

1.Clarification	2.Correction	3.Extension
		Х

Location (Identify all change proposal locations)

S-100 Version No.	Part No.	Section No.	Proposal Summary	
5.0 20210330 draft	9	See attached	Multiple viewing groups per drawing instruction.	
	9a	See attached	Multiple viewing groups per drawing command.	

Change Proposal

Update Part 9/9a to allow assignment of multiple viewing groups per drawing instruction.

Change Proposal Justification

Facilitates portrayal implementation of feature annotations, especially the S-52 "text group" concept. Causes annotations to toggle with the annotated feature by extending *DrawingInstruction* to allow multiple viewing groups; all viewing groups must be "on" to enable the drawing instruction.

Allows portrayal to emit text instructions with two (or more) viewing groups: a viewing group to toggle the text visibility, and a viewing group of the annotated feature/drawing instruction(s). The annotation is therefore only visible when the annotated feature is visible.

The concept also applies to symbol annotations, such as the S-101 date dependent and additional chart information (INFORM) symbols.


What parts of the S-100 Infrastructure will this proposal affect?

- □ S-100 Feature Concept Dictionary Interface or Database
- □ S-100 Portrayal Register
- □ S-100 Feature Catalogue Builder
- S-100 Portrayal Catalogue Builder
- S-100 UML Models
- S-100 GitHub Schemas

Please send completed forms and supporting documentation to the secretary S-100WG.

S-100 Change Proposal Form (Updated April 2016)

-1-

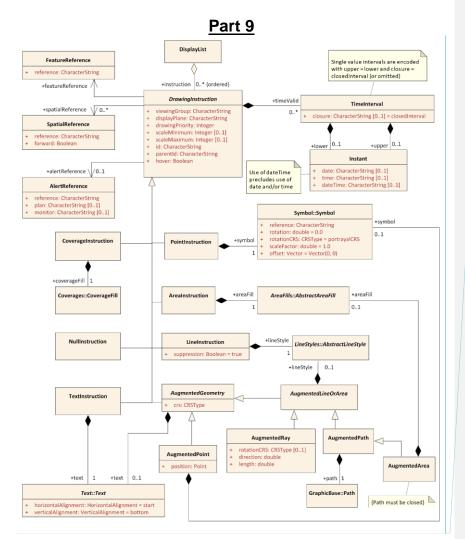

Commented [DMG1]: Update to *DrawingInstruction*: + viewingGroup: CharacterString [1..*]

Figure 9-10 — Drawing Instructions

9-11.1.3 Viewing Groups, Viewing Group Layers and Display Mode

The viewing group is a concept to control the content of the display. It works as an on/off switch for any drawing instruction assigned to the corresponding viewing group. The concept can be seen as a filter on the list of drawing instructions.

A drawing instruction which has multiple viewing groups is disabled when any assigned viewing group is disabled.

Viewing groups can be aggregated into Viewing Group Layers and Viewing Group Layer can be aggregated into Display Modes. Both aggregations are part of the portrayal catalogue.

S-100 Change Proposal Form (Updated April 2016)

9-11.2.2 DrawingInstruction

Role Name	Name	Description	Mult.	Туре
Class	DrawingInstruction	Abstract base class for all drawing instructions	-	-
Attribute	id	An identifier for the drawing instruction	01	string
Attribute	parentId	Instruction is dependent on a parent drawing instruction	01	string
Attribute	hover	Specifies whether the instruction is shown only on hover-over. OEM support for this feature is optional	01	boolean
Attribute	viewingGroup	The viewing group(s) the instruction is assigned to instruction is disabled if any viewing group is disabled.	1 <u>*</u>	string
Attribute	displayPlane	The display plane the instruction is assigned to	1	string
Attribute	drawingPriority	The priority that defines the order of drawing	1	integer
Attribute	scaleMinimum	Scale denominator to define the minimum scale for which the instruction will be shown. If not given there is no minimum scale	01	integer
Attribute	scaleMaximum	Scale denominator to define the maximum scale for which the instruction will be shown. If not given there is no maximum scale	01	integer
Role	featureReference	The reference to the feature type that will be depicted by the instruction	1	FeatureReference
Role	spatialReference	The reference(s) to the spatial type components of the feature that defines the geometry used for the depiction. Not used when the entire geometry of the feature should be depicted	0*	SpatialReference
Role	timeValid	The drawing instruction is valid during the specified time interval(s)	0*	TimeInterval
Role	alertReference	The reference to the alert in the alert catalogue that is triggered by the geometry of the instruction	01	AlertReference

<u>Part 9a</u>

Table 9a-1 – Drawing Commands

Command	Parameters	Parameter Type	Part 9 Reference	
TextInstruction	text	String	9-11.2.10	
	textViewingGroup	String	9-11.2.12	
	textPriority	Integer		

9a-11.2.1

[...]

TextInstruction:*textIntextIngGroup[.textPriority]]* Instructs the host to draw the specified text placed as follows:

Table 9a-2 – TextInstruction Initial Placement

Geometry Type	Initial Placement
Point	Relative to the point

S-100 Change Proposal Form (Updated April 2016)

Line Relative to the line as determined by <i>LinePlacement</i>	
Area	Relative to AreaCRS. Note that this can cause the text to be drawn at multiple locations

Once the initial positioning is determined, the text is offset as specified by state commands *LocalOffset* and *TextVerticalOffset*. The text is aligned as specified by state commands *TextAlignHorizontal* and *TextAlignVertical*.

If preceded by a *FontReference* command the font is as specified in the Portrayal Catalogue. Otherwise the host should construct a font using the values specified by preceding *FontColor*, *FontSize*, *FontProportion*, *FontWeight*, *FontSlant*, *FontSerifs* and *FontStrikethrough* state commands.

text	The text to display.
textViewing(Sroup
	 If present, defines an additional viewing group that must be selected in order for the text to be displayed.
textPriority	 If present, defines the display prioritry of the text. If not present, the display priority indicated by the <i>DisplayPriority</i> instruction is used.

9a-11.2.2.1 Visibility Commands

Visibility commands affect the visibility and drawing order of all subsequent drawing commands. They correspond to attributes of the Part 9 clause 9-11.2.2 *DrawingInstruction* class.

Table 9a-3 – Visibility Commands

Com	nmand	Parameters	Туре	Initial State	Part 9	Notes
View	vingGroup	viewingGroup	String[]	<u></u>	9-11.1.3	For example: 21000
		<u>viewingGroupN</u>				

ViewingGroup:viewingGroup[.viewingGroup2[...]]

Sets the viewing group(s) for drawing commands which follow. The drawing command is disabled if any viewing group is disabled.

Applicability: All drawing commands-except NullInstruction

S-100 Change Proposal Form (Updated April 2016)